



F16. 1

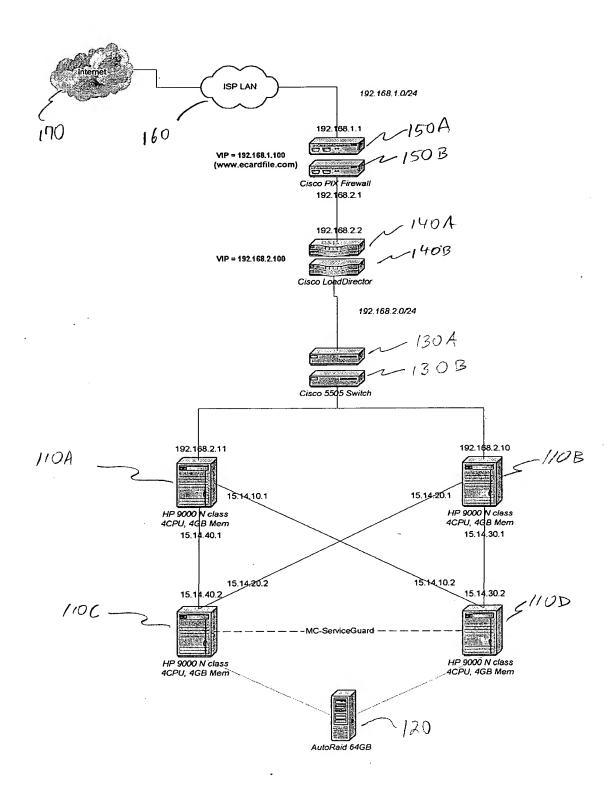


F16. 2

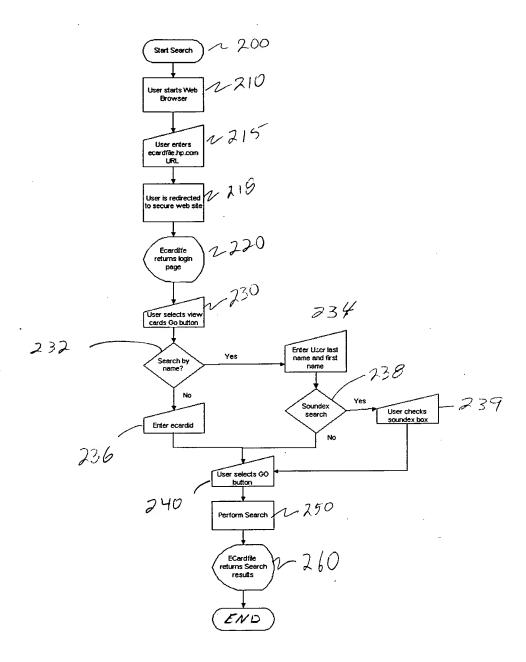


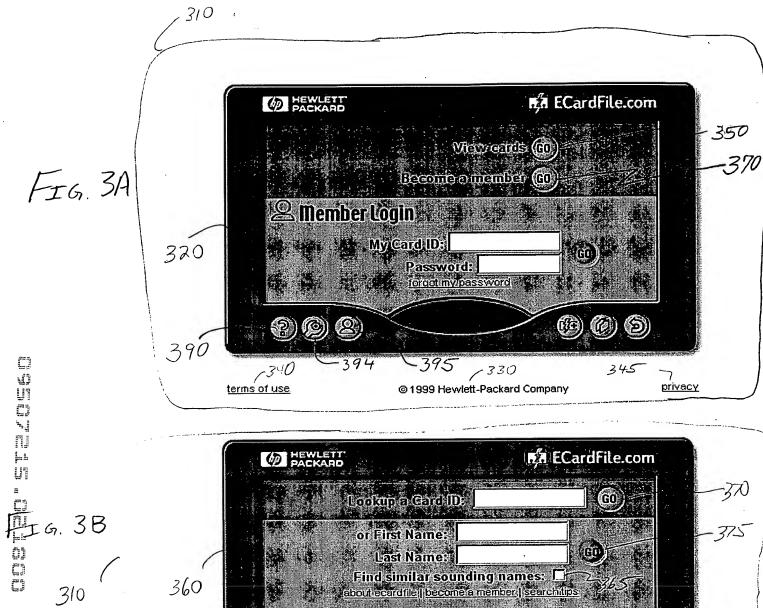


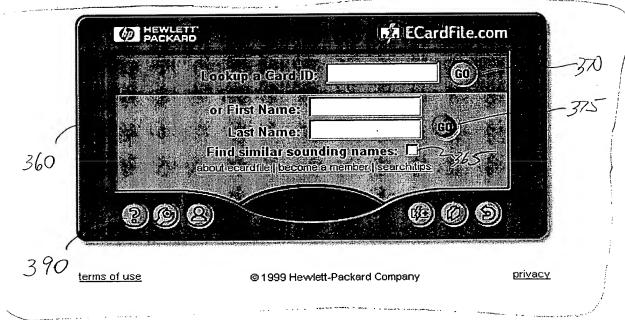

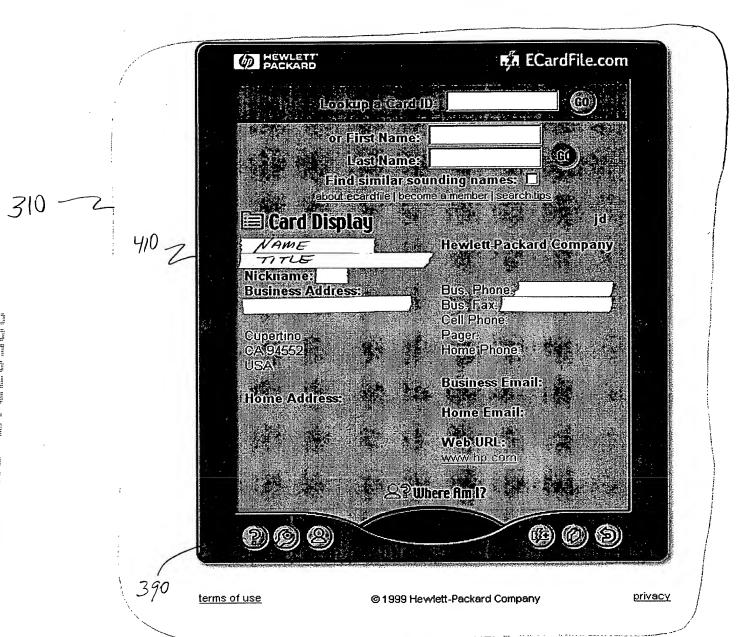

these open and of the face for the

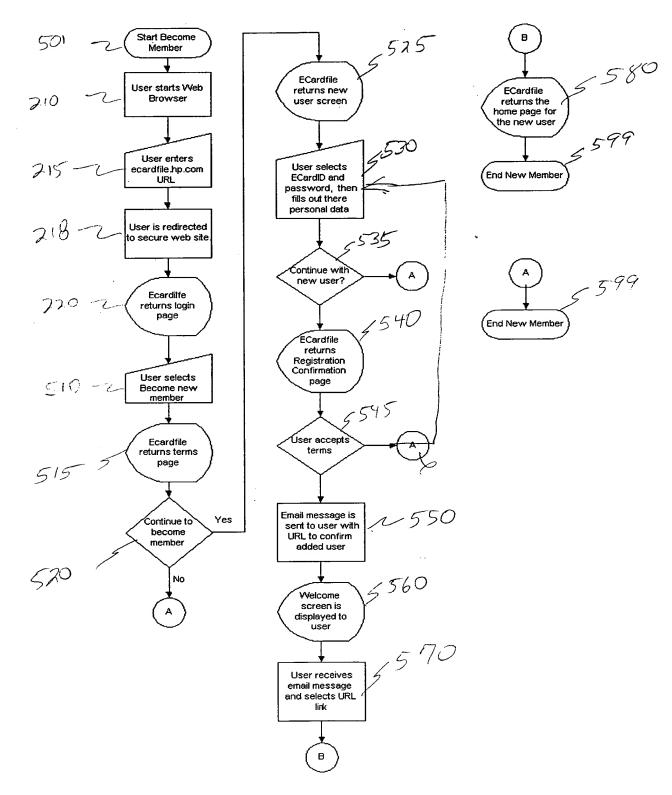

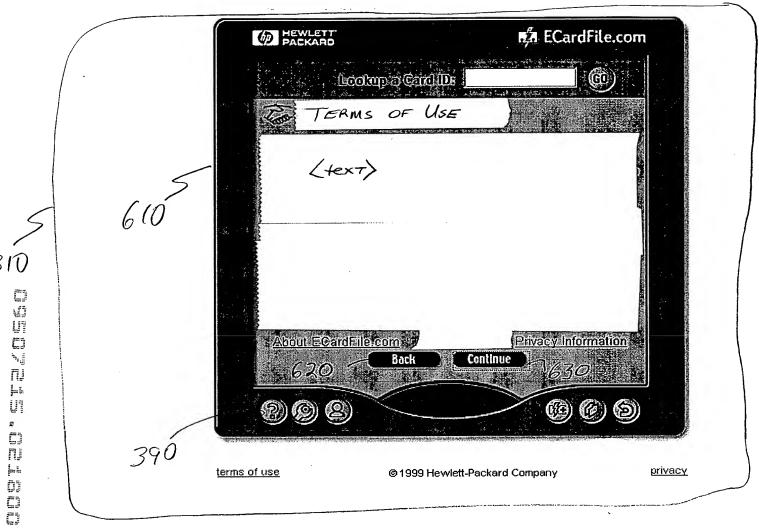


FA ECardFile.com 310 = (GO) Lookup a Card Dis Privacy Private Semi-Private Public Levels: 🚨 New User 🗵 My Card ID: terry LEGEND Your unique identifier. Up to 14 letters/numbers. Entered at "Look up a 724 Card." Ex. James D. 710 1772 Password: Retype Pass: / Key: 726 Fig. 1B Title: Ex: Mr, Ms etc. C) G A PH TO THE STATE OF First Name: 🔠 O O . O Nick Name: (2) \mathbf{C} Middle Name: Last Name: ΠĴ Suffix: Ex: Php., M.D. **(3**) C. \mathbf{C} 0 Company Name: O**©** Job Title: N **Business** 720 Comment: Web Page URL: 6 Address 1: Business 🛣 O \mathbf{C} 0 C C City: 0 State/Province: Ç) (O) Zip/Postal: Country:

10		V User Bottom:			
		Home ছ		O O	# A S S S S S S S S S S S S S S S S S S
	~ ~				
	710	City:			6
		State/Province:			
,		Zip/Postal:		0.0	
(0	\$ \frac{1}{3}.	Country:			
GENO					6
		Phone: Bus. Phone	22		
-1		Bus. Fax			(a)
Fig. 7A		Cell Phone			o l
		Pager 🔄			o l
00		Home Phone 🔽		100	Q.
ig. 7B		4.5744	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
		E mail: Business ☑		0.0	
		Home 🗖	· · · · · · · · · · · · · · · · · · ·	0.0	
			Total State Control	THE PART OF THE	
		Email Auth:	700670.	2750	
	**** **** ***	This is the email addres will not be displayed on	s ECardFile uses for admir	nistrative purposes.	#
			Okay 🧎 Cancel		
		5-73x	garage AG	740	
		(a) (b) (c)			<u>ම</u>)

.


FA ECardFile.com Lootup a Card De or First Name: Last Name: Findsimilar sounding names: bout ecardfile | become a member | search lip Registration Confirmation Thank you. Your card registration is complete, and your oassword will be activated shortly. BEFORE YOU GAN LOG IN: To protect your identity, ECardFile authenticates you before activating your password. The authentication process is as eas as 1-2-3: 4 4 4 4 4 2 - Click on the ACCEPT button below to signify your acceptance of ECardFile.com's terms of use 2. I - ECardFile then sends an email to the address you : ; entered in the "email auth" field of the registration form. - As soon as you reply to the email, you can log in. Accept Back 390 privacy terms of use @ 1999 Hewlett-Packard Company


and the little of the ord of the first that the little of the little of

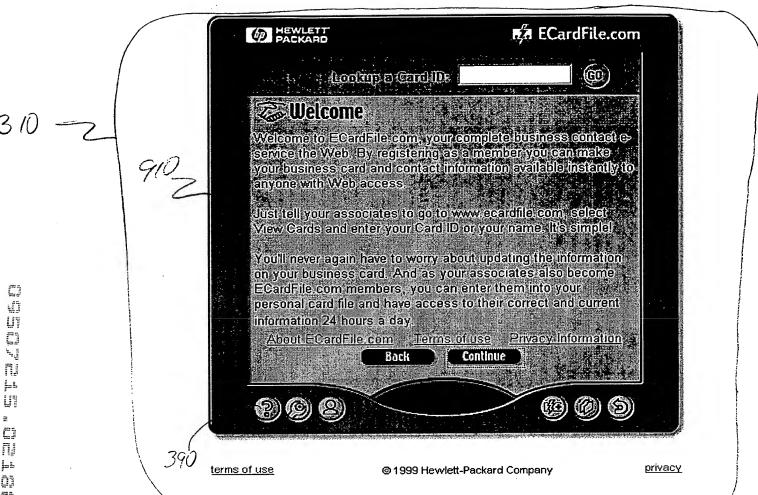


Ma ECardFile.com Lookope Endlik or First Names Last Names ____ Find similar sounding namess .□ about ecardfile | become a member | search tips My EcardFile is your personal drawer for storing cards. It is empty until you addicards. To add a card: look up the member When the card is displayed, click the s flan "II" and JF II" flan ffra graft out of the flant flant flant flant frank treet to the flant "Add" icon. To view the cards in your cardfile: use the alphabet display. Click "A" to list the members in your card file whose last name starts with A, click "All" to list all the members in your cardfile. It is a list a specific card: click on the member's name to display his or her card information.

To update your ECardFile: click the "Update" icon to change privacy levels, delete cards, or export cards to your address book. card information. 395 390 privacy terms of use @ 1999 Hewlett-Packard Company

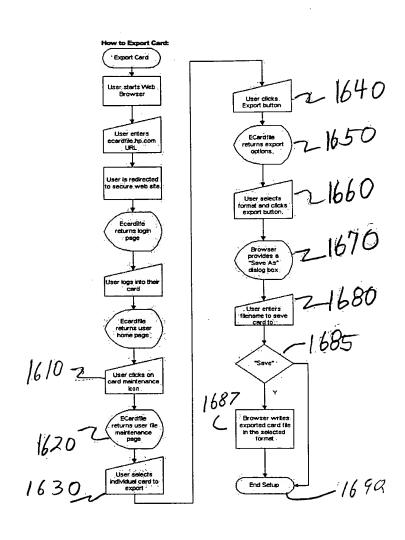


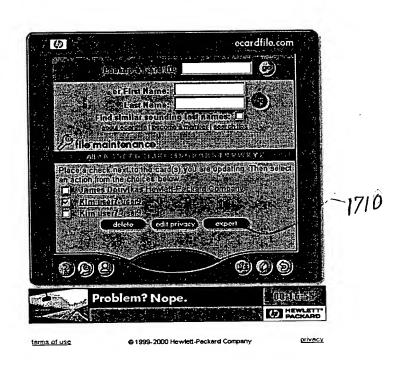



M-8157 WS

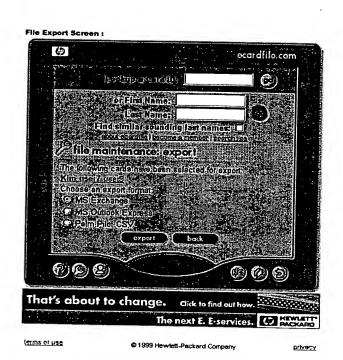


M-8157 US

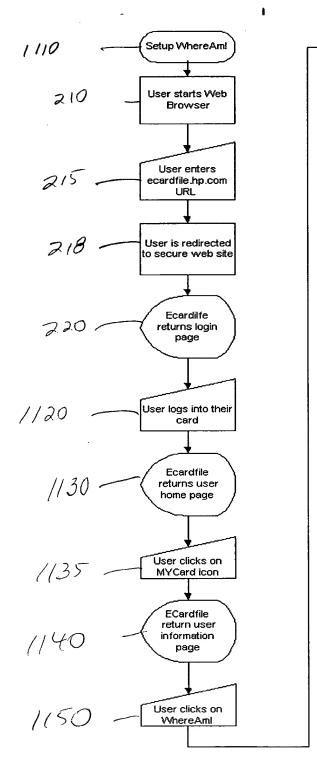

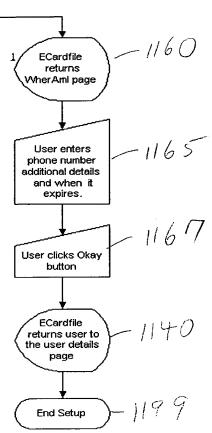


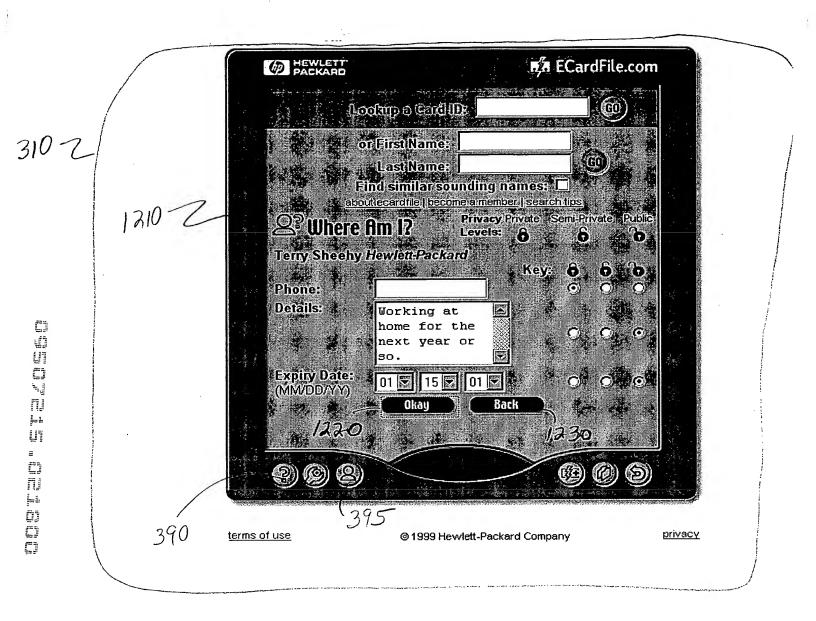


#IG. 16

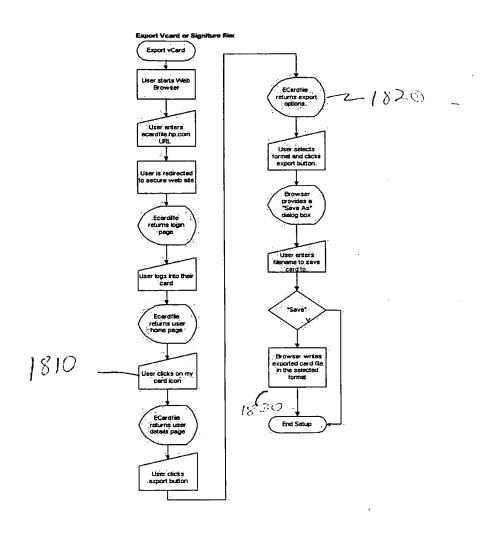

HZG 17




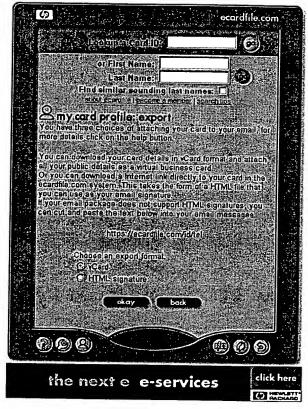

terms of use

@ 1999-2000 Hewlett-Packard Company

priyacy

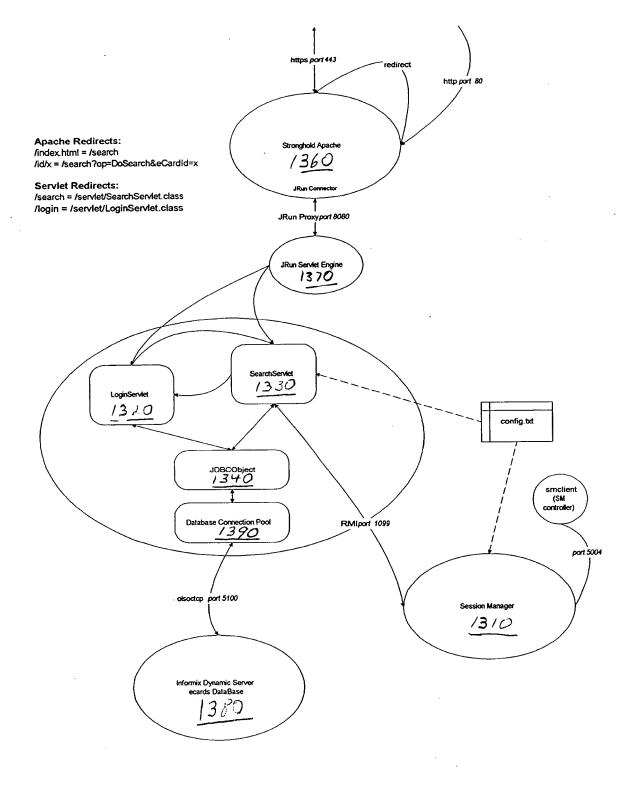


الإسار الإسار الله المستخدمة المستخدمة المستخدمة المستخدمة المستخدمة المستخدمة المستخدمة المستخدمة المستخدمة ا المستخدمة F16. 19A

Database Schema

PK,FK1	usersid	SERIAL		PK	addressid	SERIAL
	accudid	CHAR!(IO)	-		optaddresstype	SMALLINT
	ecardid	CHAR(40)			streetline1	VARCHAR(50)
	epassword	CHAR(10)	J		pvtstreetline1	SMALLINT
	emailauth	VARCHAR(100)	1		1 *	
	title	VARCHAR(10)			streetline2	VARCHAR(50)
	pvttitle	SMALLINT			pvtstreetline2	SMALLINT
	firstname	VARCHAR(30)	-HO		streetline3	VARCHAR(50)
	pvtfirstname	SMALLINT	"		pvtstreetline3	SMALLINT
	middlename	VARCHAR(30)			city	VARCHAR(40)
	pvtmiddlename	SMALLINT			pvtcity	SMALLINT
	lastname	VARCHAR(30)			stateprovince	VARCHAR(30)
	pvtlastname	SMALLINT			pvtstateprovince	SMALLINT
	suffix	VARCHAR(10)			zippostal	VARCHAR(15)
	p∨tsuffix	SMALLINT			pvtzippostal	SMALLINT
	companyname	VARCHAR(50)	ļ		country	VARCHAR(40)
	pvtcompanyname	SMALLINT			pvtcountry	SMALLINT
	jobtitle	VARCHAR(50)	<u> </u>	FK1,I1	addressuserid	INTEGER
	pvtjobtitle	SMALLINT	'			
	businesscomment	VARCHAR(100)				
	pvtbusinesscommen		(ii)			
	webpageurl	VARCHAR(100)		Jerrae Wellean		The State of the S
	pvtwebpageurl	SMALLINT			phone.	
	altfirstname	VARCHAR(30)		PK	phoneid	SERIAL
	pvtaltfirstname	SMALLINT		- N	prioriera	SERIAL
11	ecardid_lc	CHAR(14)	-H ○		optphonetype	SMALLINT
12	firstname_lc	VARCHAR(30)] "		phonenumber	VARCHAR(30)
13	lastname_lc	VARCHAR(30)			pytphonenumber	
14	altfirstname_lc	VARCHAR(30)		FK1,I1	phoneusersid	INTEGER
15	soundex	CHAR(4)	1	LL I'II	priorieusersia	MIEGER
	+	1	}			· · · · · · · · · · · · · · · · · · ·
. A.	+ - 	T		PK	emaild optemalitype	SERIAL SMALLINT
ł	1410	#	-		emailid	
		#	-	PK	optemalitype emailaddress pytemailaddress	SMALLINT VARCHAR(100) SMALLINT
PK	1410	#	⊙ ≼	PK	optemalitype emailaddress pytemailaddress	SMALLINT VARCHAR(100) SMALLINT
PK	/4/0 whereamid	# ! ! ! ! ! ! ! ! ! ! ! ! ! ! ! ! ! ! !	-	PK	optemalitype emailaddress pytemailaddress	SMALLINT VARCHAR(100) SMALLINT INTEGER
PK	whereamid contact	SERIAL VARCHAR(30)	○ €	PK FK1,I1	emailid optemalitype emailaddress pvtemailaddress emailusersid	SMALLINT VARCHAR(100) SMALLINT INTEGER
PK	whereamid contact pvtcontact	SERIAL VARCHAR(30) SMALLINT		PK FK1,I1	emailid optemailtype emailaddress pvtemailaddress emailusersid	SMALLINT VARCHAR(100) SMALLINT INTEGER
PK	whereamid contact pvtcontact details	SERIAL VARCHAR(30) SMALLINT VARCHAR(255)		FK1,I1 PK lo	optemalitype emailaddress pytemailaddress emailusersid lookup okupid SERIA	SMALLINT VARCHAR(100) SMALLINT INTEGER
PK	whereamid contact pvtcontact details pvtdetails	SERIAL VARCHAR(30) SMALLINT VARCHAR(255) SMALLINT		FK1,I1 PK lo	emailid optemalitype emailaddress pytemailaddress emailusersid ilookup okupid SERIA	SMALLINT VARCHAR(100) SMALLINT INTEGER
PK	whereami whereamid contact pvtcontact details pvtdetails expirydate	SERIAL VARCHAR(30) SMALLINT VARCHAR(255) SMALLINT DATE		FK1,I1 PK lo	emailid optemalitype emailaddress pytemailaddress emailusersid *lookup okupid stegory escription SMAL VARC	SMALLINT VARCHAR(100) SMALLINT INTEGER LINT HAR(30)
PK	whereamid contact pvtcontact details pvtdetails expirydate pvtexpirydate	SERIAL VARCHAR(30) SMALLINT VARCHAR(255) SMALLINT		FK1,I1 PK lo	emailid optemalitype emailaddress pytemailaddress emailusersid *lookup okupid stegory escription SMAL VARC	SMALLINT VARCHAR(100) SMALLINT INTEGER

F16. 19B

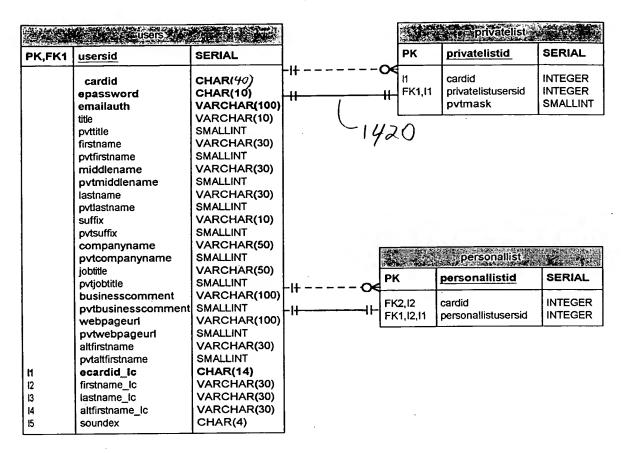

38Y	i i ba	nner.
PK	bannerid	SERIAL
	htmlstring	NVARCHAR(200)

44	lockedip	"特别"
PK	lockedipid	SERIAL
	ip dateoflock	CHAR(15)

F16. 19C

K	iuserid	SERIAL		PK	iaddressid	SERIAL
	luseriu	SERIAL		<u> </u>	laddressid	OLIVIAL
	dateofentry	DATE			optaddresstype	SMALLIN
1	sessionid	CHAR(15)		1	streetline1	VARCHA
	ecardid	CHAR(40)		•	pvtstreetline1	SMALLIN'
	epassword	CHAR(10)			streetline2	VARCHA
	emailauth	VARCHAR(100)			pvtstreetline2	SMALLIN'
	title	VARCHAR(10)		ļ	streetline3	VARCHA
	pvttitle	SMALLINT	-l+ ○ €	İ	pvtstreetline3	SMALLIN'
	firstname	VARCHAR(30)			city	VARCHA
	pvtfirstname	SMALLINT			pvtcity	SMALLIN
	middlename	VARCHAR(30)			stateprovince	VARCHA
	pvtmiddlename	SMALLINT			pvtstateprovince	SMALLIN'
	lastname	VARCHAR(30)			zippostal	VARCHA
	pvtlastname	SMALLINT			pvtzippostal	SMALLIN
	suffix	VARCHAR(10)			country	VARCHA
	pvtsuffix	SMALLINT			pvtcountry	SMALLIN
	companyname	VARCHAR(50)		FK1	iaddressuserid	INTEGER
	pvtcompanyname	SMALLINT	'			·
	jobtitle	VARCHAR(50)				
	pvtjobtitle	SMALLINT				
	businesscomment	VARCHAR(100)				
	pvtbusinesscomment	t e		700		THE RESERVE AND ADDRESS.
	webpageurl	VARCHAR(100)	U. 2		iphone	44.5
	pvtwebpageurl altfirstname	SMALLINT		PK	iphoneid	SERIAL
		VARCHAR(30) SMALLINT	-H -		ipitoticia	OLIVIAL
	pvtaltfirstname				optphonetype	SMALLIN
	soundex	CHAR(4)			phonenumber	VARCHAI
	<u></u>				pytphonenumber	1
	i			FK1	iphoneuserid	INTEGER
	1				I I PITOTIO GOOTILE	
	!					
	}					
	i					
	!					
	1					
	i			TE A	: iemail	
	1			to the state of the		
	i			PK	iemailid	SERIAL
)		_ 1	- 1		
)				optemailtype	SMALLINT
)					SMALLINT VARCHAR
)	. .			emailaddress	